

**MADE
IN
ITALY**

PIUSI
®




Fluid Handling Innovation

GENERAL FOLDER - 05.15



**EXPLOSION
PROOF**



**FUEL
TRANSFER**



**GARAGE
EQUIPMENT**



**AdBlue®
SOLUTIONS**

IT-EN-FR-DE-RU

IT. L'azienda

PIUSI nasce nel 1953 a Suzzara, in provincia di Mantova, come officina meccanica per applicazioni agricole che si è distinta per i prodotti resistenti e di facile utilizzo, adatti a PIU'-USI.

La costante ricerca per fornire soluzioni innovative, frutto del genio dell'eccellenza Italiana, ha portato PIUSI alla realizzazione di un'area produttiva, di un magazzino automatizzato e di moderni uffici pari a 25.000 m², inseriti in un'area di 44.000 m².

I valori che ci guidano

Qualità, riconosciuta dal mercato e da organismi internazionali che attestano sia l'affidabilità dei processi produttivi (UNI EN ISO 9001:2008) che l'attenzione per l'ambiente (UNI EN ISO 14001:2004).

I prodotti

PIUSI spa fornisce soluzioni professionali, di semplice utilizzo e di elevate prestazioni per il travaso, per il rifornimento e per la misurazione di lubrificanti, carburanti e liquidi.

EN. The company

PIUSI was established in 1953 in Suzzara, in the province of Mantua (Italy). They started as a mechanical engineering workshop serving the agricultural industry. The company soon made a name for itself as a manufacturer of strong and easy-to-use products suitable for a range of "different uses" (più-usi).

Research is constantly focused on finding innovative solutions, the upshot of the genius of Italian excellence. This has led PIUSI to set up modern offices and a manufacturing facility which includes an automated warehouse on a covered surface area of 25,000 m² (270,000 SqFt), part of a larger area covering 44,000 m² (470,000 SqFt).

Our guiding values

Quality, recognised by the market and by international bodies which certify the reliability of production processes (UNI EN ISO 9001:2008) and environmental friendliness (UNI EN ISO 14001:2004)

Products

PIUSI spa provides professional, easy-to-use and top-performance solutions for transferring "dispensing" and measuring fuels, lubricants and liquids.

FR. L'entreprise

PIUSI a été fondée en 1953 à Suzzara, dans la province de Mantoue : il s'agissait d'un atelier mécanique fabriquant des applications agricoles, qui s'est aussitôt distingué pour ses produits robustes et faciles à utiliser, et surtout polyvalents (en italien, PIU'-USI).

La recherche constante visant à fournir des solutions innovantes, fruit du génie de l'excellence italienne, a mené PIUSI à réaliser une aire de production, un magasin automatisé et des bureaux modernes sur 25 000 m², le tout enchâssé dans un espace de 44 000 m².

Les valeurs qui nous guident

La qualité : reconnue par le marché et par des organismes internationaux qui attestent non seulement la fiabilité des processus de production (UNI EN ISO 9001:2008), mais aussi l'attention pour l'environnement (UNI EN ISO 14001:2004)

Les produits

PIUSI spa fournit des solutions professionnelles, simples à utiliser, mais aux performances élevées, pour le transvasement, le ravitaillement et la mesure de lubrifiants, carburants et liquides.



DE. Das Unternehmen

Gegründet wurde PIUSI 1953 in Suzzara in der Provinz Mantova als Werkstatt für Landmaschinen. Das Unternehmen zeichnete sich durch robuste, leicht einsetzbare und vielseitig verwendbare Produkte aus. Ständige Suche nach innovativen Lösungen, typisch für italienischen Forschergeist, hat dazu beigetragen, dass aus PIUSI eine Produktionsstätte mit automatischem Lagersystem, modernen Büros auf 25.000 m² auf einem 44.000 m² großen Gelände wurde.

Unsere Grundsätze

Qualität, von den Märkten und internationalen Organisationen anerkannt, die die Zuverlässigkeit der Produktionsprozesse (UNI EN ISO 9001:2008) und den Umweltschutz (UNI EN ISO 14001:2004) bestätigen

Die Produkte

PIUSI spa liefert professionelle Lösungen, einfach anwendbar bei hoher Leistung für das Umfüllen, die Abgabe und die Messung von Schmier- und Kraftstoffen und Flüssigkeiten.

RU. Компания

Компания PIUSI была основана в 1953 г. в городе Суццара провинции Мантуя. Сначала это была механическая мастерская для сельскохозяйственных нужд, продукция которой отличалась стойкостью, простотой в применении и многофункциональностью (итал. PIU'-USI). Благодаря непрерывным исследованиям и разработкам инновационных решений, а также традиционному итальянскому стремлению к превосходству предприятие PIUSI со временем расширило производственную площадь, построило автоматизированный склад и современные офисы площадью 25 000 м² на территории 44 000 м².




Ценности, которыми мы руководствуемся

Качество нашей продукции получило признание как на рынке, так и в международных организациях, которые проводят аттестацию надежности производственных процессов (UNI EN ISO 9001:2008) и ответственного отношения к окружающей среде (UNI EN ISO 14001:2004).

Продукция

Акционерное общество PIUSI предлагает профессиональные, высокоэффективные и в то же время простые решения для перекачивания, заправки и измерения смазочных веществ, топлива и жидкостей.

PIUSI
®

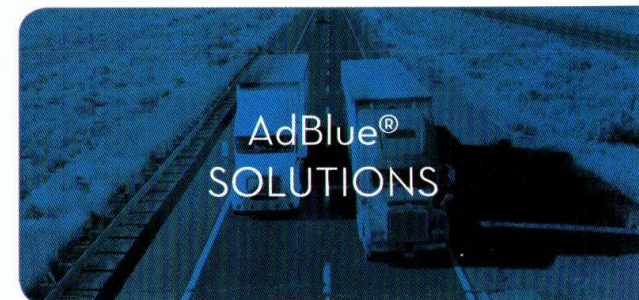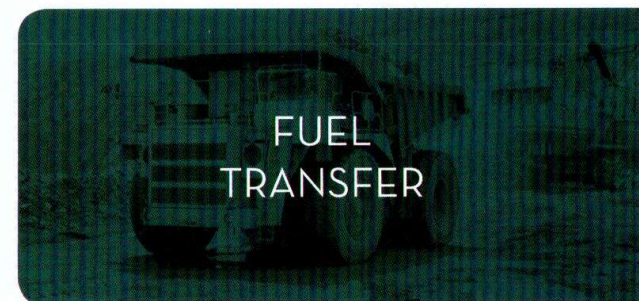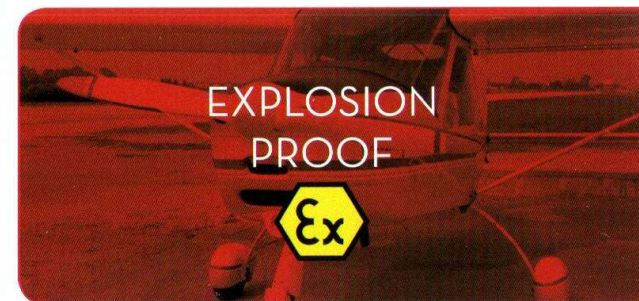

MADE
IN
ITALY



EXPLOSION PROOF

MADE
IN
ITALY

EXPLOSION PROOF

FUEL TRANSFER

CARAGE EQUIPMENTS

AdBlue® SOLUTIONS

PIUSI DRUM EX50

DGK

Flow rate up to
50 l/min (13 gpm)



Water captor



2" connector



K33 ATEX meter

Available:



Automatic nozzle

Available:

Telescopic pipe




PIUSI EX50

DGK

Flow rate up to 50 l/min (13 gpm)

1" BSP



EX50 GROUP



EX50 PUMP

REGISTERED
DESIGN



On/off switch



Flanged
connection



Compact and
sturdy construction

K24 - ATEX / IECEx

DGK

Flow rate 7-120 l/min (2-32 gpm)

Accuracy: +/- 1 %



Bidirectional



Rotable
display



Turbine
pulse meter



UL classified

REGISTERED
DESIGN
PATENTED

K33 ATEX

DGK



Flow rate up to 120 l/min (32 gpm)


Accuracy: +/- 1 %

3,5 bar (50 psi)

1" BSP



Nutating disk
system



SELF SERVICE K44

DB

Flow rate up to 90 l/min (24 gpm)


Accuracy: +/- 1 %



Filter integrated
(column version)



Mechanical meter
integrated



Tank version
available



SELF SERVICE MC **DB**

Flow rate up to 90 l/min
(24 gpm)

Accuracy: +/- 0.5 %

Users no. 80 max




Self service desk
software (available)




Display cover



Water captor
filter



Tank version
available

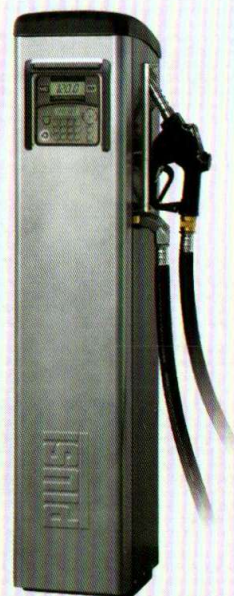

SELF SERVICE FM

DB

Flow rate up to 90 l/min (24 gpm)

Accuracy: +/- 0.5 %

Users no. 120 max



Ticket printer




Display cover



Self service desk
software (available)



Water captor
filter



Level indicator



Tank version
available



DISPENSERS

MADE
IN
ITALY

CUBE 56 - 70



Flow rate up to 70 l/min (18 gpm)


Accuracy: +/- 1 %



Water captor
(optional)



2" Drum connector
(optional)

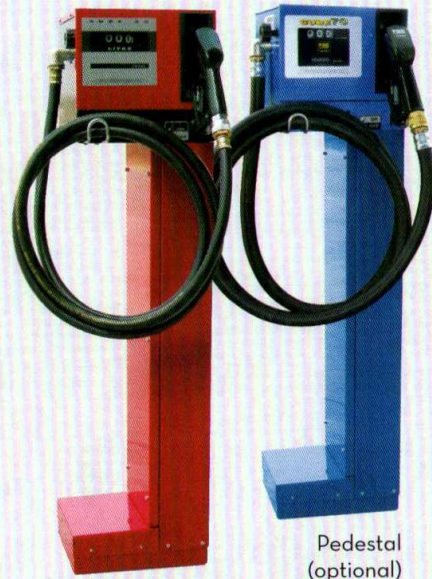

Pedestal
(optional)

CUBE 70 MC D

Flow rate up to 70 l/min (18 gpm)

Accuracy: +/- 0,5 %

Users no. 120 max



CUBE 70 MC LITE



Users no.
120 max




READY
TO USE



Self service desk
software (optional)

CUBE MC PRESET available




SELF SERVICE DESK

DBGKOU




Software

up to 200 mt indoor
up to 500 mt outdoor

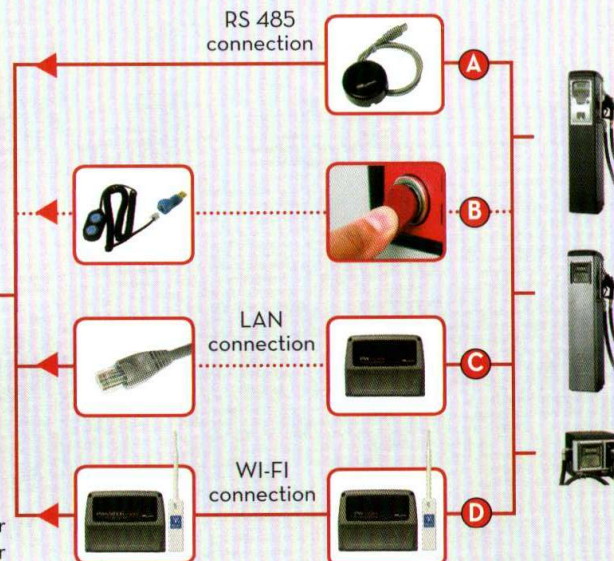

PC CONNECTIONS

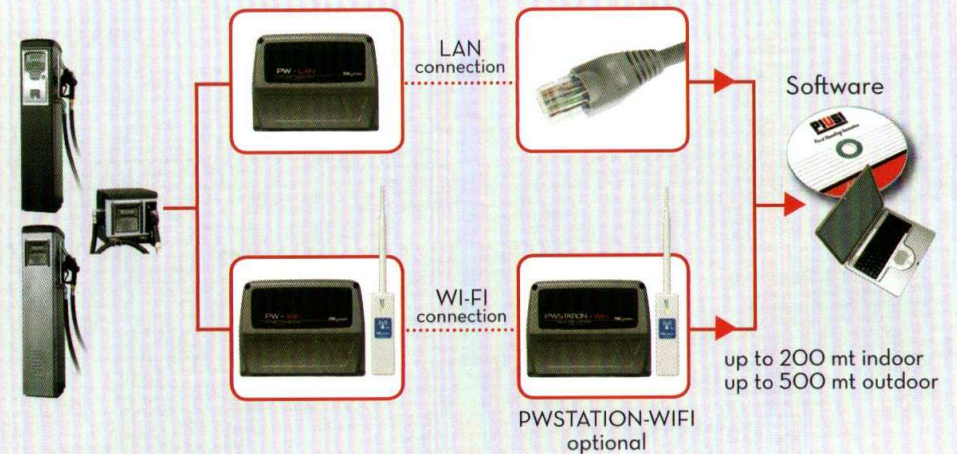

FLUID MONITORING


PIUSI

MC BOX SYSTEM

DBGKOU



Users no. 120 max



Pump unit
switch on/off




Receives
quantity
pulses from:
Flow meters



Receives
enabling
signal from:
Level switch




Receives
enabling signal
from: Micro
switch on nozzle




Users
identification
PIN code
and/or
User key

PC
connection



Remote
printer

MC BOX PRESET WITH PULSEOUT



Display
cover

OCIO

DBOUW



up to 30 cst

Accuracy: $\pm 1\%$ (end of scale)

Fuel level
10mm

Measured resolution




Fuel volume
20 litres

Calculated resolution



Fuel %
1%

Calculated resolution




Power AC

PATENTED

Alarm



PC
communication
kit



MC BOX LITE

DBGKO



READY TO USE

Users no. 20 max




Kit keys



Users
identification
PIN code
and/or
User key



OCIO DESK SOFTWARE

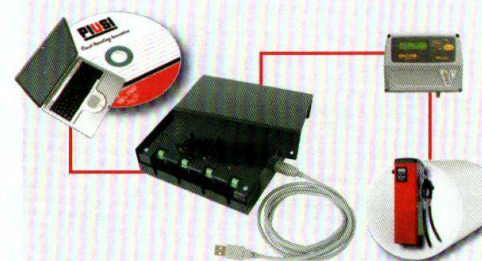

OCIO GSM



EXPLOSION PROOF

FUEL TRANSFER

GARAGE EQUIPMENTS

AdBlue® SOLUTIONS

F

UID MONITORING

D

ISPENSERS

MADE
IN
ITALY

SELF SERVICE 2.0

DBGKOU

EXISTING LAN NETWORK



HARDWARE 2.0

MAGNETIC KEY
(ON REQUEST)

WIFI
(ON REQUEST)

SELF SERVICE
MANAGEMENT 2.0



User
management



Vehicle
management



ACCESS 85 DBGKO

Users no. 85 max

Emergency
button

Key
reader

Functional led

Start and
stop button

OCIO Level control

Nozzle switch control



ST D

Flow rate up to 90 l/min (24 gpm)



ST WITH METER D

Flow rate up to 90 l/min (24 gpm)

Accuracy: +/- 1 %



ST WITH METER + FILTER D

Flow rate up to
85 l/min (22 gpm)

Accuracy: +/- 1 %



Water captor
filter



Meter K33



Automatic
nozzle



Clear captor
filter



Suction hose

EXPLOSION PROOF

FUEL TRANSFER

GARAGE EQUIPMENTS

AdBlue® SOLUTIONS

ST BOX D

Flow rate up to 85 l/min (22 gpm)

Accuracy: +/- 1 %



Water captor



ST 200 DC D

Flow rate up to 185 l/min (48 gpm)

24 V



ST 200 AC D

Flow rate up to 200 l/min (52,7 gpm)

230 V



DRUM DBO

Flow rate up to 80 l/min (21 gpm)

Accuracy: +/- 1 %



Drum with meter



Drum Kit available



PIUSI PITSTOP DC D

Flow rate up to 45 l/min (15 gpm)



3/4" BSP



14 m hose



Built in DC pumps



Automatic nozzle



READY TO INSTALL

AUTOMATIC HOSE REEL



DISPENSERS

PIUSI BOX D

Flow rate up to 45 l/min (11,9 gpm)

12 V 24 V



REGISTERED
DESIGN
PATENT
PENDING

BATTERY KIT DO

Flow rate up to 50 l/min (10 gpm)

12 V 24 V



BATTERY KIT
BIPUMP



BATTERY KIT
PANTER



BATTERYKIT
OIL

BATTERY KIT 3000



PICO ADW



Flow rate up to 35 l/min (9 gpm)



Base version
without meter



Version
with meter




NOZZLES

MADE
IN
ITALY

MANUAL NOZZLE DBGOW

Flow rate up to 150 l/min (40 gpm)



Swivel

AUTOMATIC NOZZLE DBGOW

Flow rate up to 280 l/min (74 gpm)




Automatic stop

HOSEREEL AUTOMATIC D

1" male BSP


10 bar (145 psi)



Hand
protections



Hosereel
without hose

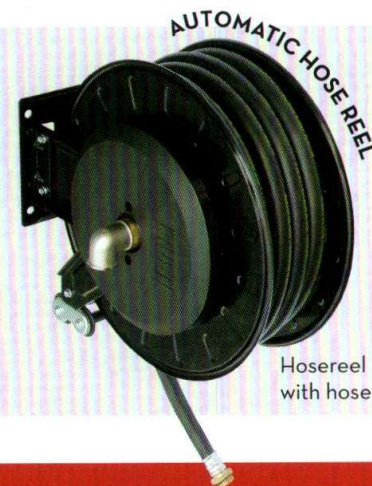


Hosereel
with hose

PANTHER 56 - 72 D

-  Flow rate up to 72 l/min (19 gpm)
-  1" BSP



Vane rotors



Filter

PANTHER 72



PANTHER 56

BP3000 - BP3000 INLINE

-  ≤ 50 l/min (13 gpm)
-  3/4" BSP



REGISTERED DESIGN



CARRY D

-  ≤ 50 l/min (13 gpm)



E80 - E120 D

-  ≤ 100 l/min (26 gpm)
-  1" BSP
- 




VISCOMAT VANE D B O

-  ≤ 50 l/min (13 gpm)
-  3/4" BSP
-  ≤ 500 cSt
-  ≤ 6 bar (87 psi)
- 



VANTAGE 60 D


-  Flow rate up to 60 l/min (15,9 gpm)
- PC interface



VANTAGE 100

-  Flow rate up to 100 l/min (26 gpm)

REGISTERED DESIGN
PATENTED

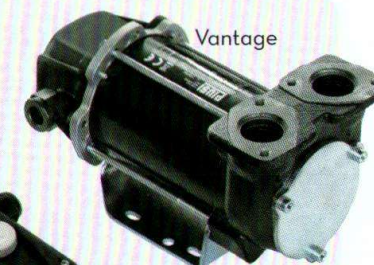

Remote electronic box

HAND PUMPS



PANTER DC D



-  ≤ 70 l/min (18,5 gpm)
-  1" BSP



BIPUMP D

-  ≤ 85 l/min (22,4 gpm)
-  1" BSP



FLOW METERS


MADE
IN
ITALY

MECHANICAL METER K33 - K44

DBO

Flow rate 20-120 l/min (5-32 gpm)

Accuracy: $\pm 1\%$

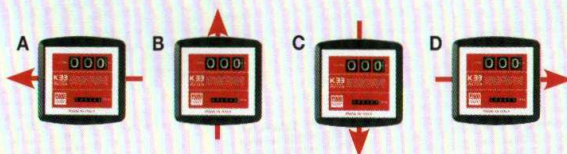

ELECTRONIC METER K600 B/3

PATENTED

DBO

Flow rate
up to
100 l/min
(26,4 gpm)

Accuracy:
 $\pm 0,5\%$



ELECTRONIC METER K400

DBO

REGISTERED
DESIGN

Flow rate
up to
30 l/min
(7,9 gpm)

Accuracy:
 $\pm 0,5\%$



DIGITAL TURBINE METER K24

ADEFGKUW

PATENTED

Flow rate 7-120 l/min (2-32 gpm)

Accuracy: $\pm 1\%$



Rotatable display



REGISTERED
DESIGN

Bidirectional

ELECTRONIC METER K600/3

PATENTED

ABDO

Flow rate
up to
100 l/min
(26,4 gpm)

Accuracy:
 $\pm 0,5\%$



ELECTRONIC METER K600/4

PATENTED

ABDO

Flow rate
up to
150 l/min
(39 gpm)

Accuracy:
 $\pm 0,5\%$



MECHANICAL METER K700

D

Flow rate
20-220 l/min
(5-53 gpm)

Accuracy:
 $\pm 1\%$



ELECTRONIC METER K200

ABDGO

Flow rate
up to
2,5 l/min
(0,66 gpm)

Accuracy:
 $\pm 0,5\%$




ELECTRONIC METER NEXT/2

O

Flow rate up to
60 l/min
(15,8 gpm)

Accuracy:
 $\pm 0,5\%$



	 bar (psi)	 BSP
K33 - K44	10 (142)	1"
K24	20 (300)	1"
K700	10 (142)	1" 1/2
K200	500 (7200)	1/4"
K200 HP	1000 (14500)	1/8"
K600/3	70 (994)	3/4" - 1"
K600/4	20 (284)	1" 1/2
K400	70 (994)	1/2"
NEXT/2	70 (994)	3/4"

EXPLOSION-PROOF

FUEL TRANSFER

GARAGE EQUIPMENTS

AdBlue® SOLUTIONS

PULSE-METERS **A B D G O W**

Flow rate up to 150 l/min (39 gpm)

Accuracy: +/- 0,5 %



Oval gear



K200 HP
1/8" BSP




K200
1/4" BSP



K400
1/2" BSP



K24
turbine
meter
1" BSP

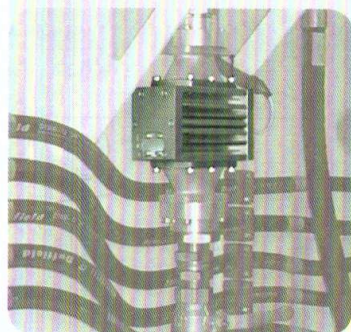


K600/3
3/4"-1" BSP



K600/4
1" 1/2 BSP



K700
2" BSP

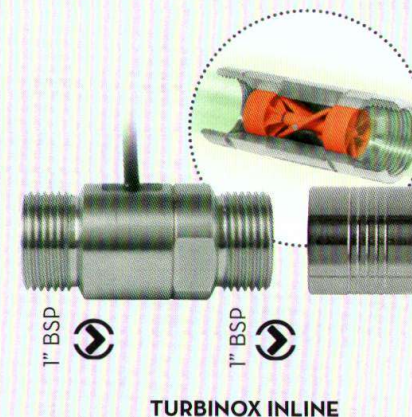

TURBINOX INLINE

K900 **A B D O**

Flow rate up to 500 l/min (132 gpm)

Accuracy: +/- 0,5 %



Oval gear

3" BSP



K900

REMOTE DISPLAY FOR PULSE METER

B D O U W



A

CESSORIES

F

ILTERING

MADE
IN
ITALY

COUPLING, FITTINGS AND FLANGED CONNECTIONS

DBO



FILTROLL

DO

Flow rate up to
56 l/min (15 gpm)



Filtroll
Diesel

Two step filtration



Diesel
version



Oil/diesel
version



Filtroll
Oil/Diesel

CONNECTORS

Extensible
steel pipe



2" quick
coupling

2" connectors BSP

FOOT VALVE

DBO

1" BSP

Vantage
valve



PATENTED

Foot valve
with filter

Foot filter

DEPUROIL

O

Flow rate
up to 25 l/min
(6,6 gpm)



Cartridge



Foot filter




LINE FILTER 1-1

DBG O

F/F, flanged

1" BSP



FILTERS

FILTERS

DBGO

Flow rate
up to 150 l/min
(39,6 gpm)

1" BSP



Clear Captor filter
100 l/min



Water Captor
70 l/min
with water
absorbing
30 µ



Clear Captor strainer
100 l/min



Water Captor
150 l/min
with water
absorbing
30 µ



Clear Captor water filter
with water absorbing
70 l/min



Bio-fuel filter
70 l/min
with water
absorbing
10 µ



Bio-fuel filter
100 l/min
with water
absorbing
10 µ



Oil and fuel filter 100 l/min



Oil and fuel filter 60 l/min

DISPENSERS

PIUSI

DRUM VISCOMAT

Flow rate up to 25 l/min (7 gpm)

Accuracy: +/- 0,5 %

up to 2000 cSt



BATTERY KIT OIL

Flow rate up to 10 l/min (3 gpm)

up to 600 cSt

12 V 24 V



VISCOTROLL AC

DBO

Flow rate up to 25 l/min (7 gpm)

Accuracy:
+/- 0,5 %

up to
2000
cSt



Drum not
included



VISCOTROLL DC

Flow rate up to 6 l/min (1,6 gpm)

Accuracy:
+/- 0,5 %

up to
2000
cSt



Drum not
included



EXPLOSION PROOF

FUEL TRANSFER

GARAGE EQUIPMENTS

Autobloc SOLUTIONS

PUMPS

NOZZLE METERS

MADE
IN
ITALY

VISCOMAT GEAR

≤ 14 l/min (3,7 gpm)

1" BSP

≤ 2000 cSt

≤ 25 bar
(362 psi)



VISCOMAT VANE

≤ 50 l/min (13 gpm)

3/4" BSP

≤ 500 cSt

≤ 6 bar
(87 psi)



VISCO-FLOWMAT


≤ 14 l/min (3,7 gpm) ≤ 2000 cSt

≤ 25 bar (362 psi) 1" BSP



Gear rotors

Adjustable max
delivery pressure

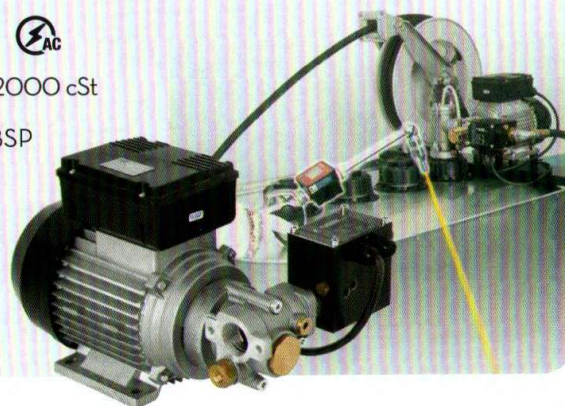

VISCOMAT DC

Flow rate up to 10 l/min (2,8 gpm)

up to 2000 cSt



Gear rotors

VISCOMAT DC 60/2
VISCOMAT DC 120/1

1/2" - 3/4" BSP

VISCOMAT
DC 60/1



K500 PRESET



Flow rate up to 30 l/min (7,8 gpm)

Accuracy: +/- 0,5 %

up to 2000 cSt

1/2" BSP



High protection



Sealed battery compartment



Automatic
no drip valve

K40



Flow rate up to 30 l/min (7,8 gpm)

Accuracy: +/- 1 %

up to 2000 cSt

1/2" BSP



Mechanical counter



Meter with
oval gears



K40 meter
+ nozzle
+ flexible extension

K400



Flow rate up to 30 l/min (7,8 gpm)

Accuracy: +/- 0,5 %

up to 2000 cSt

1/2" BSP



Multifunction display



K400 meter
+ nozzle
+ flexible extension

GREASTER



≤ 2,5 kg/min ≤ 550 bar (7975 psi)

+/- 3 %

1/4" - 1/8" BSP



Multifunction display



Meter with oval gears




GREASTER nozzle
+ rigid spout
+ Z swivel

EASYOIL



Flow rate up to 30 l/min

Work pressure 70 bar 1/2" BSP



Trigger lock



Filter



EASY OIL nozzle
+ swivel
+ flexible spout

NEXT/2



Flow rate up to 60 l/min (15 gpm)

Accuracy: +/- 0,5 %

3/4" BSP



Meter with oval gears



Semi-automatic no drip valve



NOZZLE METER NEXT/2
+ rigid extension

Pistol-ONE



Flow rate up to 90 l/min (23,8 gpm)

Work pressure 100 bar 3/4" BSP



Semi-automatic no drip valve



Pistol-ONE
+ rigid spout

SPECIAL EQUIPMENTS

OIL MONITORING SYSTEM

MADE
IN
ITALY

VACUBOX



FULLY
AUTOMATIC

Flow rate up to 10 l/min (3 gpm)



Hand clean!



Direct into waste
oil storage tank



Suction



CAMBIAOLIO



Portable oil charger

Flow rate up to 10 l/min (3 gpm)



Probe Kit



Pressure Gauge



Tank 12 liter


EASY TO USE



MCO SYSTEM



Users up to 900

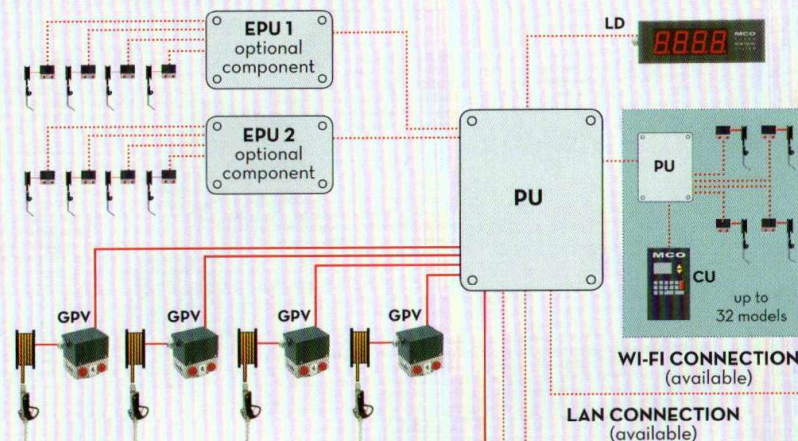


TE
ticket printer
integrated

PC
INTERFACE

MANAGEMENT
SOFTWARE

OCIO DESK

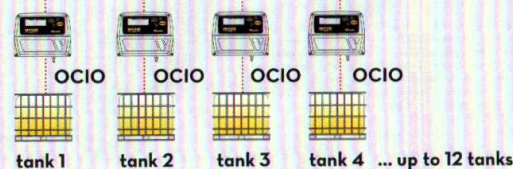

GPV

- Flow rate up to 30 l/min (7,9 gpm)
- Accuracy: +/- 0,5 %



Valve



Filter



Oval gears



AMALFI

AMALFI 5

- Flow rate ≤ 34 l/min (9 gpm)

- 1/2" BSP



AMALFI 1

GARDA

GARDA 5

- Flow rate ≤ 10 l/min (2,6 gpm)

- 3/8" BSP



GARDA 1

GARDA 2

OCIO



PATENTED

- up to 30 cst

- Accuracy: +/- 1 % (end of scale)



OCIO desk



OCIO gsm



DISPENSERS AND PUMPS

- Flow rate up to 35 l/min (9 gpm)

- Pico 12 V DC
- + k24 meter
- + manual nozzle



SuzzaraBlue DC pump

SuzzaraBlue AC pump

DUMBOX

Container and Funnel



Flexible



Cap



Inbuilt filter



NOZZLES AND METERS

- Flow rate up to 120 l/min (30 gpm)

- Accuracy: +/- 0,5 %



Oval gears



Rotable display



K24 turbine digital meter



Easy windscreen

Easy windscreen with K400 meter

DISPENSERS

MADE
IN
ITALY

SUZZARABLU DELPHIN


AdBlue® car dispenser



AC Pump




Fitting Valve

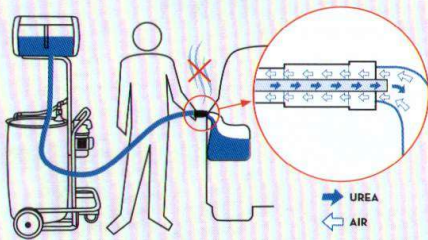

CLOSED SYSTEM


**PATENT
PENDING**

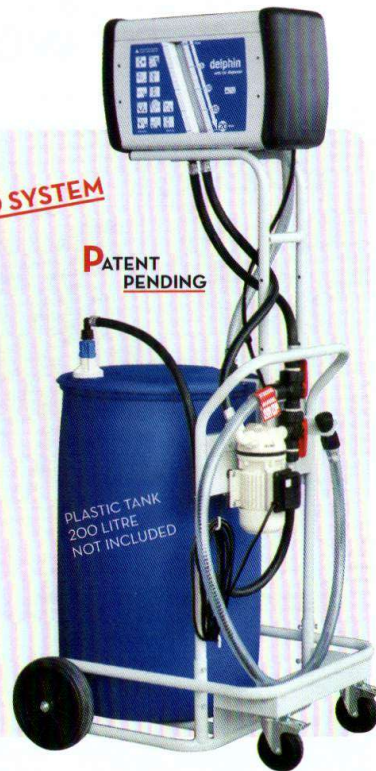

SUZZARABLU SIDE

Flow rate up to 32 l/min (8,5 gpm)

Accuracy: +/- 1 %



SEC connection



External suction



SUZZARABLU PRO (K24+SB325 nozzle)

PIUSI BOX FOR Adblue

Flow rate up to 36 l/min (9,2 gpm)

24 V



PIUSI THREE25

Accuracy: +/- 1 %



New Safety lock
bracket system



AdBlue® long
life 3D Filter




Sturdy Stainless
Steel Plate



Crimped EPDM
delivery hose

**TURN KEY
SYSTEM**

**100%
MADE IN
ITALY**

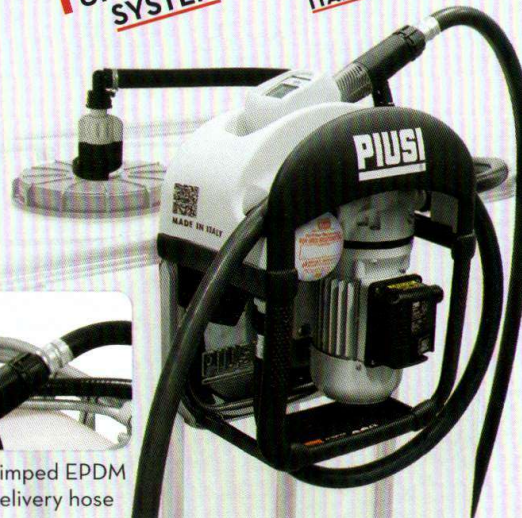

SUZZARABLU BOX

Flow rate up to 32 l/min (8,3 gpm)

Accuracy: +/- 1 %



K24 meter



Automatic nozzle



Hose and foot valve



SUZZARABLU TROLL

 Flow rate up to 32 l/min (8,5 gpm)

On request:



Troll



Side



Dip tube



SUZZARABLU PUMPS

 Flow rate up to 36 l/min (9,2 gpm)



On/off switch

DC PUMPS



DC



REGISTERED
DESIGN

AC PUMPS



SUZZARABLU DRUM

 Flow rate up to 32 l/min (8,5 gpm)

Available with:



SB325 SB325 METER



Manual nozzle



SEC connection



Dip tube




PIUSI HAND PUMPS

Capacity up to 38 L (10 USG)
per 100 revolutions



Drum connector



Suction pipe



Stainless steel spout



SUZZARABLU PORTABLE KIT

 Flow rate up to 35 l/min (9,2 gpm)



DC pump



Clamps



Foot valve




SUZZARABLU HAND PUMPS

Piston hand pump
(with complete kit)



Piston
hand pump

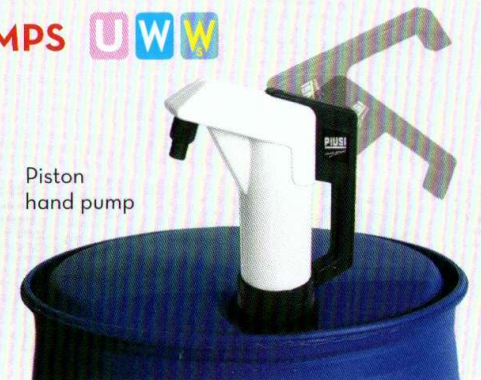

METERS AND PULSE METERS

N OZZLES

MADE
IN
ITALY

K24 UAWW

Flow rate up to 100 l/min (26,4 gpm)

Accuracy: +/- 1 %

1" BSP



ON REQUEST:



Plastic fitting



Plastic fitting



Socket 1" BSP/BSP



Pulser version



K24 METER
Rotable display

TURBINOX

Flow rate up to 40 l/min (10,6 gpm)

UAWW




ON REQUEST:



Remote display



1" BSP



1" BSP

SUZZARABLU AUTOMATIC NOZZLES UAWW

Flow rate up to 35 l/min (9 gpm)

STAINLESS STEEL
SPOUT



BREAK-AWAY
SYSTEM



Piusi magnetic
adaptor



Misfilling Kit
Spout

SB325
AUTOMATIC
NOZZLE



SB325 METER
AUTOMATIC
NOZZLE




SUZZARABLU NOZZLES

UAWW

Flow rate up to 80 l/min (21,1 gpm)

INOX
AUTOMATIC
NOZZLE

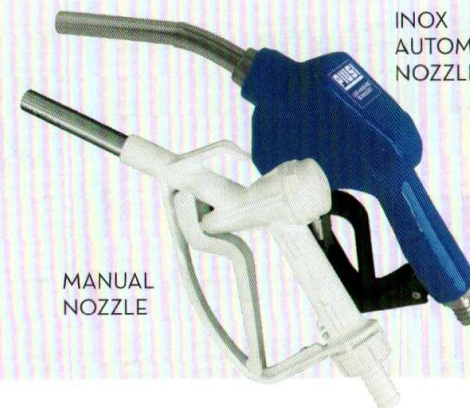

MANUAL
NOZZLE

EXPLOSION PROOF


FUEL TRANSFER

GARAGE EQUIPMENTS

AdBlue® SOLUTIONS

HOSEREEL AUTOMATIC


U A W W



Hosereel
without hose



Hosereel
with hose



Hand
protections



Hosereel Kit base
(available)

CONNECTIONS + FITTINGS

U A W W

REGISTERED
DESIGN

Suction
connections
SEC

Gravity Kit

Kit bottom
connection

Plastic fitting

EPDM Kit
suction hose

A

ANTIFREEZE

IT. Anticongelante
FR. Antigél

DE. Frostschutzmittel
RU. Антифриз

B

BIODIESEL
(B20 with
concentration up
to 20% in diesel)

IT. B20 con
concentrazione fino
al 20% nel diesel
FR. B20 avec une
concentration jusqu'au
20% dans le gasoil

DE. bis zu 20% B20
in Die selkraftstoffen
RU. B20 с концентрацией
до 20% в дизельном
топливе

D

DIESEL

IT. Gasolio
FR. Gasoil

DE. Diesel
RU. Дизельное топливо

F

FOOD

IT. Alimenti
FR. Nourriture

DE. Lebensmittel
RU. Продукты питания

G

GASOLINE

IT. Benzina
FR. Essence

DE. Benzin
RU. Бензин

G^R

GREASE

IT. Grasso
FR. Graisse

DE. Schmierfett
RU. Консистентная смазка

K

KEROSENE

IT. Cherosene
FR. Kérosène

DE. Kerosin
RU. Керосин

O

OIL

IT. Olio
FR. Huile

DE. Öl
RU. Масло

U

AdBlue®

IT. AdBlue®/Aus32/
DEF/Arla32
FR. AdBlue®/Aus32/
DEF/Arla32

DE. AdBlue®/Aus32/
DEF/Arla32
RU. AdBlue®/Aus32/
DEF/Arla32

W

WATER

IT. Acqua
FR. Eau

DE. Wasser
RU. Вода

W_s

WINDSCREEN

IT. Liquido lavavetri
FR. Liquides essuie-glaces

DE. Windschutzscheibenreiniger
RU. Жидкость для
мытья лобового
стекла

IT	EN	FR	DE	RU
 Portata massima	Max flow rate	Débit maximal	Max Durchflussmenge	Производительность
 Precisione	Accuracy	Précision	Genauigkeit	Точность
 Gestione dei dati di n°. utenti	Data management users number	Gestion des données nombre d'utilisateurs	Datenverwaltung Benutzernummer	Система управления данными кол. пользователей
 Viscosità fino a cSt	Viscosity up to cSt	Viscosité jusqu'à cSt	Viskosität bis zu cSt	Вязкость в мм2/с
 Max pressione funzionamento	Max operating pressure	Pression max. d'exercice	Max Betriebsdruck	Макс. рабочее давление
 Filtro assorbimento acqua	Water absorption filter	Filtre d'absorption d'eau	Wasseransaugfilter	Фильтр-сепаратор воды
 Tensione AC	AC tension	Tension courant alternatif	WS Spannung	Напряжение переменного тока
 Tensione DC	DC tension	Tension courant continu	GS Spannung	Напряжение постоянного тока
 Connessioni entrata/uscita	Connections Inlet / Outlet	Connexions Entrée / Sortie	Verbindungen Einlass/Auslass	Подключения Входа/Выхода
 Capacità di filtraggio	Filtering capacity	Capacité de filtrage	Filterfähigkeit	Фильтрующая способность
≤ Fino a	Up to	Jusqu'à	Bis zu	вплоть до



PIUSI S.p.A.
Headquarters
46029 Suzzara (Mantova) Italy
tel.+39 0376 534561
fax.+39 0376 536393
e-mail: piusi@piusi.com
www.piusi.com



PIUSI USA, Inc.
5553 Anglers Ave Suite 104
Fort Lauderdale, FL 33312
tel.: 954 584 1552
fax.: 954 584 1554
Email: piusiusa@piusiusa.com
www.piusiusa.com

**REQUIRE ONLY
THE ORIGINAL PIUSI
PRODUCTS**



**AUTOMATISME
INFORMATIQUE
MAINTENANCE
INSTALLATION PETROLIERE**

5 Rue de Dublin
34200 SETE
TEL : 04.67.46.18.60 FAX : 09.70.29.41.67
Mail: commercial@aimip34.com
Site : www.aimip34.com